

LED Poster


Υψηλής φωτεινότητας για βιτρίνες καταστημάτων
Pixel Pitch: 2.5mm – 3.0mm – 4.0mm

Χαμηλής φωτεινότητας για εσωτερικούς χώρους
Pixel Pitch: 1.5mm – 1.8mm – 2.0mm – 2.5mm – 3.0mm

1


We have nice frame design and **FRAMELESS DESIGN** which can be used as a **BIG SCREEN** -100% front install and service.

LED dealers can buy frameless poster on stock base on this function.

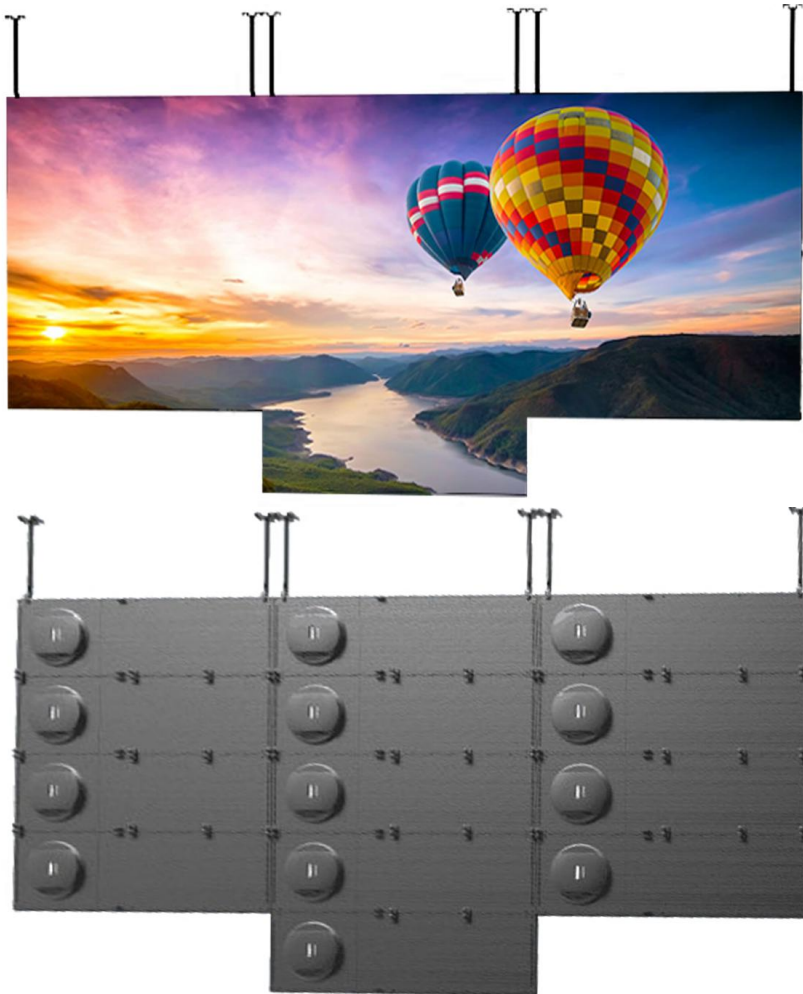

2

We offer 0° , 5° & 10° standing degrees.

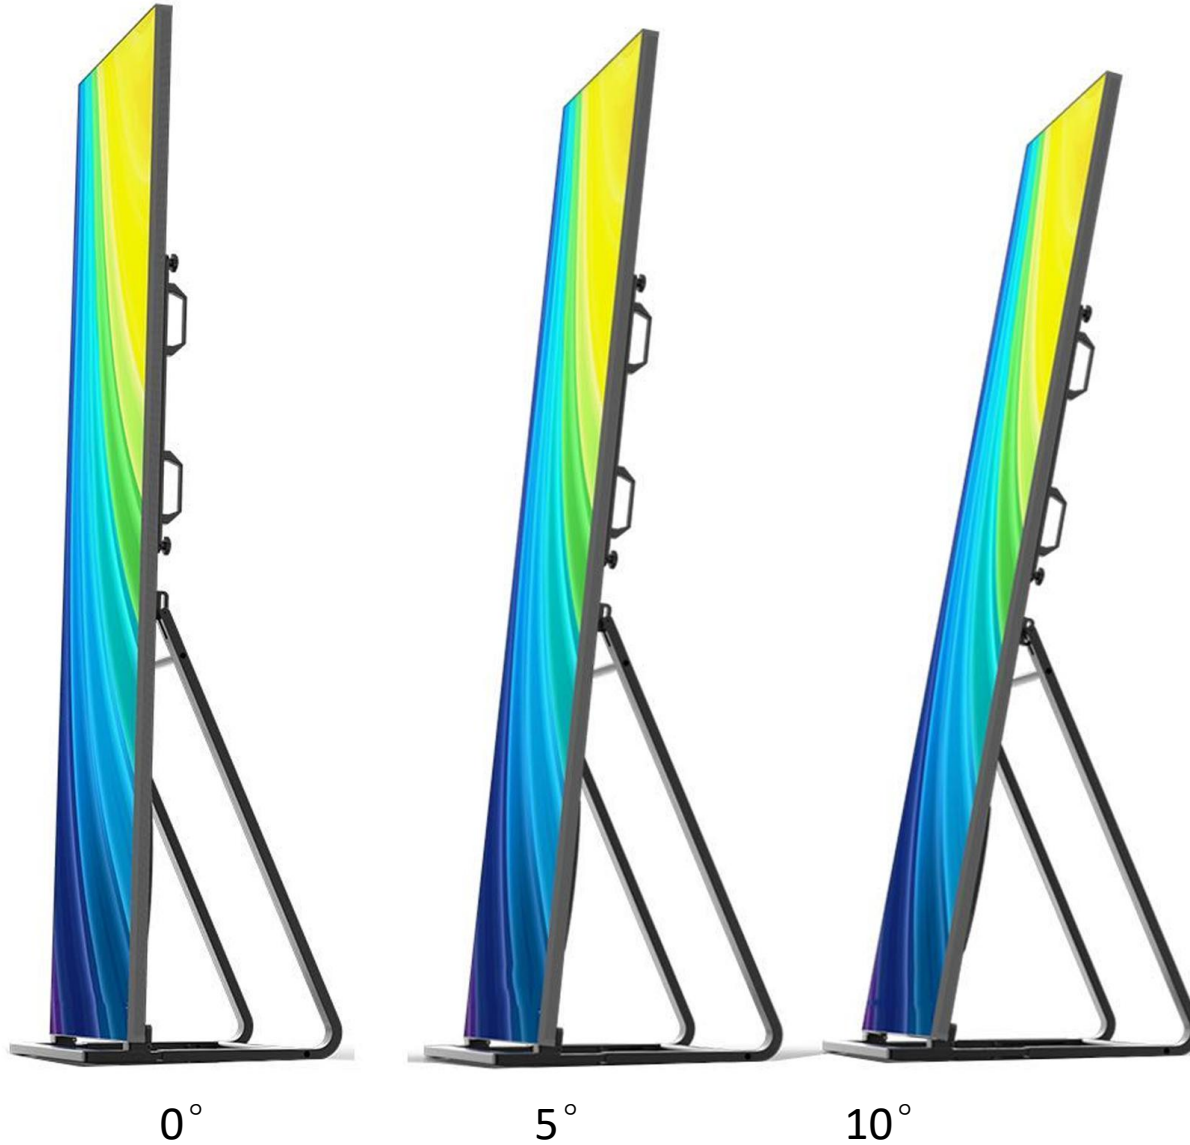

3

All-aluminum body, 18kg lighter than competitors. Anodize Painting looks higher class than common powder Painting



4


Standard Width 640mm and 960mm available, We have real UL for USA, CE for EUROPE, PSE for JAPAN to help you sell double price in local.





5

Use handlebar, tilt 15degree and move with wheels design.
Package with flight case.

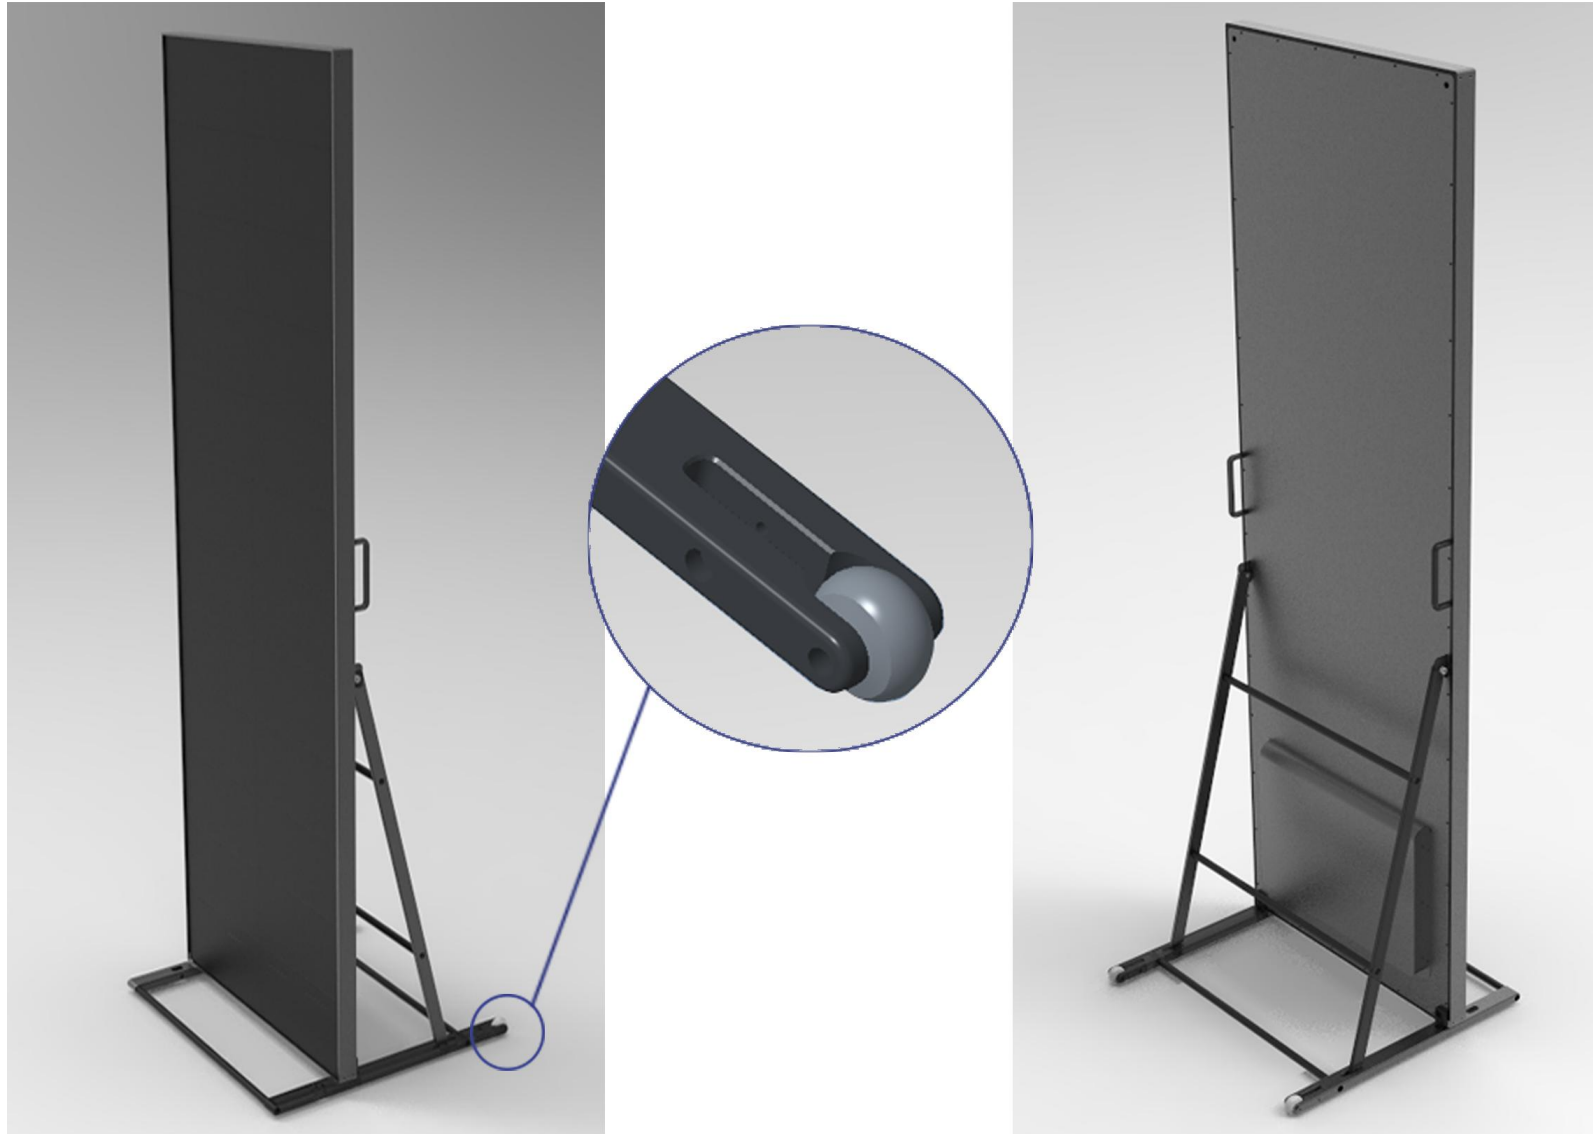


6

Standing, Wall mounting, Hanging accessories are Professional.



7

BESD offers slim outdoor posters with same design.

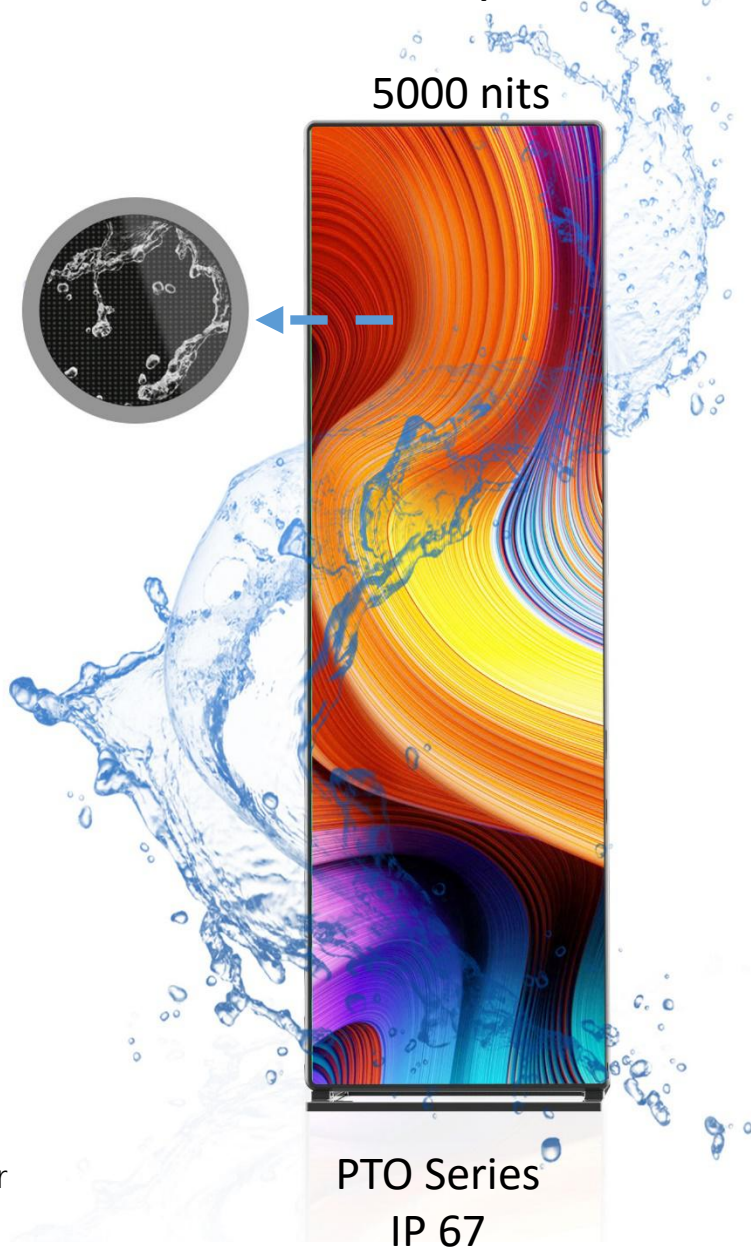

Technical Parameters

Model No.	PTI1.5	PTI1.8	PTI2.0	PTI2.5	PTI3.0	PTO2.5	PTO3.0	PTO4.0
Display size	W640 x H1920mm / W960 x H1920mm					W640 x H1920		
Overall size	W650 x H1930mm x T100mm / W970 x H1930mm x T100mm					W660 x H2020 x T100mm		
Pixel pitch	1.53mm	1.86mm	2mm	2.5mm	3.076mm	2.5mm	3.076mm	4.0mm
Pixel density(dots/m2)	422500	288906	250000	160000	105625	160000	160000	160000
LED encapsulation	SMD1010	SMD1515	SMD1515	SMD2121/1921	SMD2121/1921	SMD1415	SMD1415	SMD1921
Scan rate	1/57 scan	1/48 scan	1/40 scan	1/32 scan	1/26 scan	1/16 scan	1/13 scan	1/10 scan
Module size	320x160mm	320x160mm	320x160mm	320x160mm	320x160mm	320x160mm	320x160mm	320x160mm
Module Resolution	209x104	172x86	160x80	128x64	104x52	128x64	104x52	80x40
Screen Resolution	416x1248 / 624x1248	344x1032 / 516x1032	320x960 / 480x960	256x768 / 384x768	208x624 / 312x624	256x768	208x624	160x480
Brightness(cd/m2)	500-600	600-650	600-650	700-800	700-800	≥5000	≥5000	≥5500
Max.power consumption	500W					1200W		
Ave.power consumption	180W					450W		
Weight	32kg / 45kg					45kg Aluminum		
Degree of Protection	IP30					IP65		
Service	Front Service					Back Service		
Horizontal Viewing Angle (°)	160							
Vertical Viewing Angle (°)	110							
Refresh Rate (Hz)	≥ 1920Hz (3840Hz Optional)							
Power Supply	AC120 /240V (50Hz) (optional)							
Control System	Novastar T Series							

Thanks

For your attention.